



Introduction:

Thank you for purchasing SIMBackup 500 from TeleAdapt. This product is designed to make an electronic copy of the telephone numbers stored on the SIM (Subscriber Identification Module) card in your GSM mobile phone, simply and securely. You can also easily restore the information from SIMBackup 500 to most SIM cards. The memory capacity of SIMBackup is 16K bytes, which is equal to storing 500 contacts including telephone numbers.

SIMBackup Pack contents:

1. 1 x TeleAdapt SIMBackup 500
2. 2 x CR-2032 type batteries
3. User manual

Basic Information:

Batteries - Two batteries are included, these will last approximately 12 months. To replace the batteries, open the battery compartment on the back of the product, remove the old batteries and replace with 2 new CR-2032 type batteries.

Please note that SIMBackup 500 will not lose the stored data if the batteries expire, simply install new batteries to retrieve the information.

SIM Card - To locate your SIM Card in your mobile phone, please consult your mobile phone User Guide supplied with your model. Your Mobile Phone SIM card contains all your contact detail information including telephone numbers. SIMBackup 500 will backup these contact details but please note that information saved to the main phone memory will not be stored. Most models have a function to transfer numbers from your phone's main memory to the SIM card memory. Please consult your mobile phone User Guide for further information on this function.

User Guide: Start up

IMPORTANT - To exit from any section of the Menu press the Esc button to return to the root menu.

Firstly check that the batteries are fitted as above and that you have removed the SIM card from your mobile phone as described in your mobile phone User Guide.

Then insert the SIM Card into the bottom right of the SIMBackup 500, aligning the card as depicted in the diagram on the product. Insert the SIM Card to start the system.

The symbol will be shown, press keys 1, 2, 3 & 4 and the Enter button.

If you have a PIN code security number programmed into your phone, then the following message will be displayed;

Give PIN code

Key in the four-digit number you have chosen as your PIN Code and then press the Enter key. If you key in the wrong PIN Code, press the Esc button to return to the GIVE PIN CODE prompt and repeat as above.

If you accidentally press Enter after entering an incorrect PIN code then press Esc to return to the GIVE PIN CODE prompt and repeat as above.

IMPORTANT - If you enter the incorrect PIN Code three times your SIM Card will be locked. You will then need to contact your mobile phone provider to unlock it.

When you key in the correct PIN Code or do not use this feature on your SIM Card, the following symbol will be displayed;

backup

You are now ready to use the restore or backup functions.

First Time Use

The very first time you use SIMBackup 500 there will be no information stored in its memory.

Press Enter and the following will be displayed;

backup

Press Enter twice to begin the first SIMBackup.

A moving clockwise symbol shows the backup in progress.

Please wait a short while, then the following will be displayed;

backup and

Your SIM Card is now backed up on SIMBackup 500, please take out your SIM Card and return to your mobile phone.

Repeat Usage

IMPORTANT - To exit from any section of the Menu press the Esc button to return to the root menu.

ALL THE DATA IN THE FOLDER SELECTED TO BACKUP TO WILL BE OVERWRITTEN DURING THE BACKUP!

SIMBackup 500 can store up to 500 contacts, these are stored in two folders named &

To backup a second SIM Card, insert the SIM Card as above, key in password of 1, 2 3 & 4, then key in PIN Code if required, the following will be displayed;

backup

Press Enter

backup

Press the central SIMBackup Menu button once to select the second folder to backup to;

Press Enter twice

A moving clockwise symbol shows the backup in progress. Please wait a short while for the information to be stored, then the following will be displayed;

backup **records** and **2**

Your SIM Card is now backed up to the second folder on SIMBackup 500, please take out your SIM Card and return to your mobile phone.

Maximum storage capacity

SIMBackup 500 will store up to 500 contacts (250 in each folder) including telephone numbers and will not store the details after the 250th contact in each folder.

Restore Function

IMPORTANT - To exit from any section of the Menu press the Esc button to return to the root menu.

ALL THE DATA ON THE SIM CARD WILL BE OVERWRITTEN DURING A RESTORE!

When you have used the Backup function as above and you have information which you wish to be restored to a new SIM Card, please insert the new SIM Card into SIMBackup 500 key in password of 1, 2 3 & 4, then key in PIN Code if required, the following will be displayed;

backup

Press the central SIMBackup Menu button once to select the restore function and press Enter. Now press the SIMBackup Menu button to select which folder you wish to restore to your SIM card;

1 or 2

Once you have selected the desired folder press Enter twice.

A moving clockwise symbol shows the restore in progress.

Please wait a short while for the information to be transferred to the SIM card, then the following will be displayed;

restore **records** and **1 or 2**

Note - **1 or 2** will be shown depending on which folder was selected for the restore

Records

This Menu function displays how many contacts are contained within each folder.

Press the central SIMBackup Menu button twice to select the restore function and press Enter. Now press the SIMBackup Menu button to select which folder you wish to view and press Enter.

The right hand of the display will flash three numbers indicating how many contacts are stored in the folder. For example if 0, 8, 8 are shown then the folder has 88 contacts stored.

Delete

This Menu function allows you to delete the contacts of a folder.

Press the central SIMBackup Menu button to select the delete function and press Enter. Now

press the SIMBackup Menu button to select which folder you wish to delete and press Enter twice.

Password


This Menu function allows to set your own password.

Press the central SIMBackup Menu button to select the password function and press Enter.

Key in your new password (maximum 8 numbers) and press Enter. Repeat the password and press Enter. Your password has not been reset.

Shutdown

After 60 seconds of inactivity, SIMBackup 500 will automatically Shutdown. Please press Enter to reactivate SIMBackup 500.

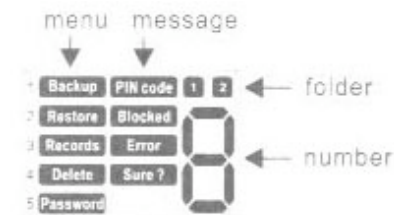

Error messages: See table below

Password + Error	Incorrect password entered
Error+ S	SIM card error
PIN code + Error	Incorrect PIN code entered
PIN Code + Blocked	SIM card blocked due to 3 incorrect entries, contact your Mobile phone network provider
Backup + Error	Backup function error, remove SIM card and repeat
Restore + Error	Restore function error, remove SIM card and repeat
Delete + Error	Delete function error, remove SIM card and repeat
Error + P	Warning of "power low" and automatically shut down after 3 seconds - Replace batteries